Zoned Comfort Solutions®

A better way to heat and cool any home, anywhere.

Ω-^μ

A MIEHREY



Take full control of your monthly bills and comfort with roomby-room comfort control – a more efficient way to cool and heat your home or business.



Unmatched Quality, Uncompromising Control

Mitsubishi Electric is the top selling brand of zoned air conditioning and heating systems. Enjoy cleaner air and superior control of cooling, heating and your monthly energy bill. In addition to being quiet, intelligent and efficient, our systems provide extraordinary service life for a lower cost of ownership.




Define Your Comfort Zones

It's simple to assign your bedrooms, kitchen, living room, office, basement and other spaces to different "zones" so each room is always comfortable. Once you decide what temperature you'd like a specific zone to be, the system will quietly maintains that temperature using the least amount of energy needed. For additional energy savings, you have the option to not cool and heat unused rooms.







2 1 2

Technology that puts comfort in your hands

The essential components of a zoned air conditioning and heating system are the outdoor unit, the indoor unit and the smart comfort controls. The system operates by delivering heat to and from an outdoor unit to one or more indoor units. The units are connected by pipes containing refrigerant, a substance that absorbs heat.

In cooling mode, the refrigerant absorbs heat inside the home and produces colder air by transferring refrigerant from the indoor units to the outdoor unit, where the heat is expelled.

In heating mode, the process is reversed and the refrigerant absorbs heat outside of the home and provides warmth by transferring the refrigerant from the outdoor unit to the indoor units. This method of heat transfer — which works even in freezing weather — is powered by electricity and is much greener than conventional systems that burn fossil fuels during heating.

The outdoor unit is equipped with an INVERTER that enables it to quickly change the amount of power it uses and the amount of refrigerant it transfers to and from the indoor units. With the INVERTER, the outdoor unit only uses the precise amount of power needed to reach each zone's preferred temperature.



Live in a cold climate?

Well-suited for climates in the northern half of the United States, our **Hyper-heating INVERTER® (H2i®)** technology will keep your home and business comfortable with 100% heating capacity at 5° F.



H2i plus® takes hyper-heating technology to a new level.

providing 100% heating capacity down to -5° F and guaranteed to provide heat down to -13° F outdoor ambient (without wind chill) temperature.



During heating operation, heat is transferred between outdoor and indoor units and cold air is expelled.

Maximize efficiency and minimize your power bill.

Conventional air conditioning and heating systems run at full power until they reach a set temperature. Then they stop. When the temperature becomes uncomfortable again they start up – sometimes within the same hour. Each time the system starts up it uses more energy than during normal operation.

With the INVERTER, our systems eliminate the wasteful start and stop cycle. They are always active and monitoring your comfort levels, intelligently adjusting the conditioning when it detects even subtle changes. Rooms are cooled and heated faster and more efficiently. You don't have to think about it, and our systems are so quiet you won't hear it either.


Our INVERTER also regulates energy consumption enabling the system to use the precise amount of energy needed to keep each room at your desired temperature. With Mitsubishi Electric you get ideal comfort that is more sustainable and saves you money.



Reduce energy consumption by up to **40**[%] annually with the INVERTER Advantage

NVERT

INVERTER vs. Conventional System Operation

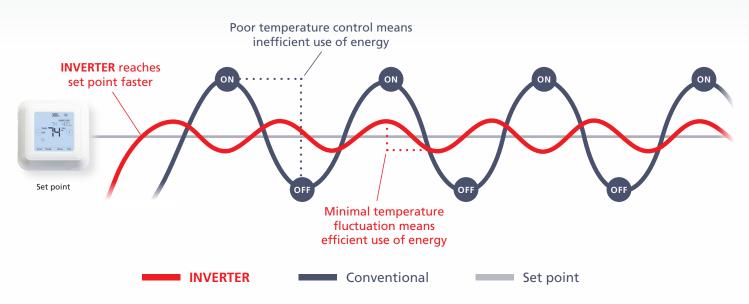

Replacing your system? intelli-Air Ducted Air Handlers deliver efficient comfort using your home's existing ductwork.

It's never been easier to keep everyone in your house comfortable, without spending a fortune on energy bills.

TTTE

Systems are available in single-zone and multi-zone solutions

With single-zone equipment, one outdoor unit connects to one indoor unit (see pages 18-25 for indoor units available). This option is ideal if you only need cooling and heating in a single space.

With multi-zone equipment, one outdoor unit can connect up to eight indoor units. This option is perfect if you need cooling and heating in multiple spaces with different functions, such as a nursery versus a kitchen or an office versus a conference room.

/	\sim
\sim	

A single-zone system is ideal if you only need cooling and heating in a **single space**.

	/	
ſ		\Box)
10		וסכ

Multi-zone systems are designed for cooling and heating **multiple spaces**.

Each zone is served by its own indoor unit. Indoor units come in a variety of forms including wallmounted units, floor-mounted units, ceiling cassettes and air handlers.

Wall-mounted units tend to be the most popular, but a floor-mounted unit could be an attractive option for a sun room that has windows, but no wall space. A highperformance air handler could replace an older system, such as a central system or boiler that previously cooled or heated an open space.

Single-zone units

One outdoor unit connects to one indoor unit



Multi-zone units

One outdoor unit can connect to up to eight indoor units



Breathe easier with advanced filtration

Our indoor units don't just keep each room in your home at the perfect temperature; they continuously clean the air of allergens, dust, viruses and bacteria. While conventional systems have only one filter installed in a central unit, our systems are equipped with filters in each indoor unit, directly improving the air quality in each and every room. The filters are washable and last up to 10 years, which saves you money on maintenance. Filters available for our indoor units include:



Nano Platinum Filter

This filter incorporates nanometer-sized platinum-ceramic particles that kill bacteria and deodorize air.

F	
Ħ	(1)
E	1837

Deodorizing Filter

These platinum deodorizing filters use nanotechnology to absorb odors and neutralize the worst smells.



Electrostatic Anti-Allergy Enzyme Filter

The electrostatic anti-allergy enzyme filter uses an enzyme catalyst to break down allergen proteins and transform them into non-allergen proteins. That means lose the sneezing, but keep the cat.



Indoor units offer a variety of filtration options that continuously clean the air of allergens, dust, viruses and bacteria.

The world's smartest comfort solutions






3D i-see Sensor®

Available with select indoor unit models, the 3D i-see Sensor increases the sensitivity of the system to your comfort needs and gives you opportunities to further customize comfort in your home or business. The sensor scans each room to produce a complete thermal profile that includes heat signatures based upon size, temperature and movement. With this capability, the 3D i-see Sensor can detect and eliminate cold or hot spots and can determine whether a room is occupied.



The **3D i-see Sensor**[®] scans each room to produce a complete thermal profile that includes heat signatures based on room size, occupancy, temperature and movement.

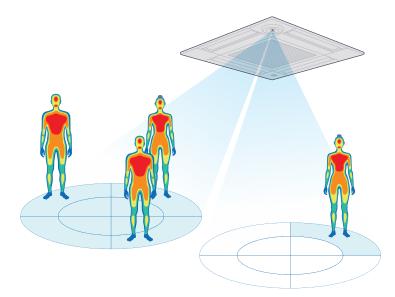

Advanced Occupant Detection

Select ceiling-recessed indoor unit models are equipped with sensors that rotate a full 360° in three-minute intervals. This allows the units to detect human body temperature and use an algorithm that calculates the number of people in the room as well as their positions.



Direct Airflow

If you want your indoor units to send airflow directly toward occupants.

Indirect Airflow

This setting is useful when the occupant does not wish to have air blowing directly on them.



Absence Detection

When no one is in the room, the 3D i-see Sensor can direct your indoor units to enter an energy-saving mode.

Controllers

Control your comfort



kumo touch™ Wireless Controller

Mount on any wall without making holes and pulling wires. The kumo touch[™] wireless controller is great for retrofits and offers a traditional user interface. Set custom temperature schedules so that your rooms are perfectly comfortable when you want them to be.



Deluxe MA Controller

This back-lit, wall mounted controller offers an easy-touse interface and includes a setting screen for the 3D i-see Sensor[®].



Touch MA Controller

Fully customizable touch panel with 180 available color patterns. Make it personal by adding your company logo to the screen.



Simple MA Controller

This controller may be simple, but it gets the job done and controls up to 16 indoor units.





Standard

Advanced


Thermostat Interface: This interface enables you to control your comfort using your favorite thermostat.

BACnet® and Modbus® Interface: If you use a Building Management System (BMS) or a home automation system such as Crestron®, this interface will enable you to control M-Series and P-Series indoor units using your existing system.

Handheld Controllers

A handheld controller comes standard with wall-mounted, floor-mounted and ceiling cassette indoor units. The controller style varies by indoor unit to support each indoor unit's product features. Advanced controllers are offered on products with additional features such as vane control and 3D i-see Sensor[®] technology.







Comfort control in the palm of your hand.

With the **kumo cloud**[®] app you can control zone temperatures, adjust fan speeds, set custom schedules, check the status of your filters and more from your smart phone or tablet. With its patent-pending algorithm, kumo cloud intelligently switches systems between cooling and heating modes as needed to make sure your rooms are always the perfect temperature. Whether you're gone for the day, away for a month, or are just too comfortable to get off the couch, kumo cloud provides you with a secure way to manage multiple zones and locations from anywhere.

When paired with **kumo station**[®], kumo cloud can also automatically manage the operation of third-party furnaces, boilers, heaters, humidifiers, dehumidifiers and ventilators. You can even add an outside air temperature sensor to give you a full picture of your environment.

kumo cloud also works with Amazon Alexa and Google Assistant allowing you to control your comfort with your voice. With built-in IFTTT Applet integration, you can even expand your system, allowing you to control other IFTTT devices directly from the kumo cloud app. kumo cloud is compatible with all current Mitsubishi Electric M-Series and P-Series systems.

Our outdoor units operate as low as 46 decibels — the level of a typical conversation.

MITSUBISH

Which outdoor unit is right for you?

Say goodbye to the noisy outdoor units of conventional systems. Our outdoor units operate as low as 46 decibels — the level of a typical conversation. Each unit has a space-saving compact design and is available in a variety of sizes to suit different cooling and heating requirements.



Single-Zone

Available as a cooling only, heat pump or a hyper-heating heat pump, each outdoor unit connects to a single indoor unit through refrigerant lines. These outdoor units have INVERTER-driven compressors that only use the precise amount of energy needed to keep the space comfortable.







Multi-Zone

Available as a heat pump or an H2i® hyperheating heat pump, each outdoor unit is capable of connecting up to eight indoor units. These outdoor units have INVERTER-driven compressors that only use the precise amount of energy needed to keep the space comfortable.









Which indoor unit is right for you?

With Mitsubishi Electric you can choose from a wide array of indoor units that reflect the cooling and heating needs, aesthetic and purpose of your space.

Key features

As you look at the styles of indoor units on the next few pages, these icons will indicate what options and capabilities are available for the units in each series. A series may include multi-zone and single-zone options as well as units of varying sizes.



Single-zone

One outdoor unit connects to one indoor unit and provides comfort in one zone.



Multi-zone

One outdoor unit connects to up to eight indoor units and provides comfort in multiple zones.



3D i-See Sensor®

The 3D i-see Sensor[®] scans each room to produce a complete thermal profile that includes heat signatures based upon size, temperature and movement.



Dual Barrier Coating

Dual Barrier Coating is applied to the interior of the unit to protect against the build-up of dirt, dust, and oil reducing maintenance and improving long-term efficiency.



Econo Cool

Econo Cool adjusts the amount of air directed towards occupants based on the air-outlet temperature.



Nano-platinum Filter

Incorporates nanometer-sized platinumceramic particles that kill bacteria and deodorize air.

	Г	Г				
	Г					[
		L				
		γ.		/		۶\
L		L	2	ı İ	7	
_ L		Д	($^{\prime}$	΄ (7

Electro-static Anti Allergy Enzyme Filter

Charged with static electricity, this filter attracts and captures dust particles, molds and bacteria and breaks them down with enzymes.



Swing Mode

An indoor unit with this capability can move air throughout the room like an oscillating fan.



Powerful Mode

Powerful Mode temporarily drops or raises the set temperature for 15 minutes so that automatic fan speed adjustments made possible by the INVERTER will more quickly bring your room to your desired temperature.



Light Commercial

Units marked with this icon are suitable for light commercial applications such as small offices, restaurants and retail.

Wall-mounted Units

Wall-mounted units are the most versatile and popular style of indoor units. Slim, stylish and equipped with filters to continuously clean indoor air, these units sit high on the wall and are ideal for conditioning smaller areas such as individual rooms in a home, office or store. This indoor unit option does not require ductwork.



The Deluxe Wall-mounted unit includes high-end features enabled by the 3D i-see Sensor® such as occupancy detection, direct mode and indirect mode. Whisper-quiet operation as low as 20 decibels eliminates unnecessary noise while air filters eliminate unwanted smells, particulates and allergens. Dual Barrier Coating is applied to the interior of the unit to protect against the build-up of dirt, dust, and oil reducing maintenance and improving long-term efficiency.





Our Designer Series EF wall-mounted units combine sophisticated technology and design. With clean lines and three finishes – glossy black, matte silver or glossy white – the Designer Series complements a variety of decor and style preferences. The Designer Series runs quietly, at noise levels as low as 21 decibels.





With compact designs and a wide-range of available sizes, the Premier Wall-mounted unit keeps rooms of nearly any size comfortable. The GL model includes the MSZ-GL heat pump which is available as a singlezone or multi-zone unit and the MSY-GL, a singlezone, cooling only unit for climates where heating is unnecessary. At 19 decibels, the GL model has the lowest noise levels in the industry.

Features:













This basic heat pump is available as a single-zone unit and keeps operating noise as low as 22 decibels.





Available as a single-zone 115 volt heat pump are ideal for homes or hotels with electrical service restrictions.





These large capacity standard wall-mounted units have Wide Airflow capabilities to ensure air reaches every corner of a room and includes the Dual Barrier Coating, and Powerful Mode feature for rapid cooling and heating. Options include a single-zone, cooling only model for climates where heating is unnecessary.



These single-zone, light commercial models are ideal for classrooms, daycare centers, small offices, server rooms and more.





F

PKA Model

12 and 18 KBTU/H Model










Ceiling-mounted Units

Ceiling-mounted options include ductless cassettes installed flush to the ceiling and ductless ceiling-suspended units for light commercial settings.



The EZ FIT[®]Ideal for retrofits, these multi-zone cassettes feature a sleek, narrow-body design resting flush to the ceiling with a service panel easily accessed from below. Perfect for residential, hotel and office spaces, MLZ units are equipped with auto vane technology to adjust air direction based upon your needs and advanced filtration capabilities.



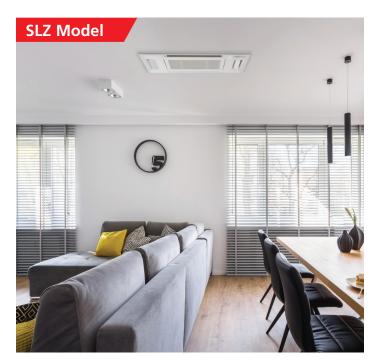

*Optional

These single- and multi-zone cassettes are designed to fit into a 2' x 2' suspended ceiling grid and mounted flush with the ceiling. A four-way air outlet provides maximum comfort by evenly distributing airflow throughout the entire room. Consider applying the SLZ with a short duct run to condition a small adjacent space. The SLZ model is available with an optional 3D i-see Sensor[®] providing ultimate comfort control.





Single-zone



Dual Barrier

Coating



Designed for large, open floor plans such as school, office and retail settings, these multi-zone cassettes neatly fit into standard ceiling tiles. Four-way air outlets with individual vane settings permit up to 72 different airflow patterns. Additional comfort and efficiency controls are available if installed with the optional 3D i-see Sensor[®].



*Optional



*Optional

These single- and multi-zone models mount suspended from the ceiling and are ideal for larger retail stores, commercial kitchens, classrooms and office spaces. Additional comfort and efficiency controls are available if installed with the optional i-see Sensor™.













Floor-mounted Units

These slim, floor-mounted units can be mounted partially recessed into the wall. Best used in a home, store or restaurant space, this is a great option if you are replacing radiators or want a unit in your sun room or attic.



Available as single-zone and multi-zone models, these units are equipped with H2i Hyper-Heating[®] technology, rapid heating capabilities and a multi-flow vane to control airflow throughout a space.





Horizontal Ducted Units

Flexible in design, and perfect for residential and hospitality settings, these units can be hidden in the ceiling or beneath the floor.



Available as a single-zone or multi-zone unit, these low static units are designed to cool and heat one or two rooms through a short duct run. The SEZ series may be mounted in the attic, hidden in the ceiling or beneath the floor, or concealed behind a bulkhead.





Available as a single-zone or a multi-zone unit, the PEAD series offers low capacities suitable for Passive Houses and large capacities suitable for light commercial uses such as offices, retail and restaurants. These medium static units are capable of serving large spaces or multiple rooms from a longer duct run. The PEAD series may be mounted in the attic, hidden in the ceiling or beneath the floor or concealed behind a bulkhead.










👌 3D i-see Sensor

Dual Barrier Coating



Ducted Air Handlers

Designed with compact cabinets, these units can provide powerful and efficient cooling and heating with or without ductwork. Ideal for residential, store or restaurant settings, a ducted air handler with INVERTER-driven capabilities is a perfect solution for new buildings. This is also applicable for upgrading or replacing furnace systems and air handlers.



PVA Model

These single-zone air handlers offer large capacities and are appropriate for large homes, multi-family buildings and light commercial spaces such as offices and restaurants. The PVA series offers long line lengths and can be installed horizontally or vertically.



SVZ Model

These compact and quiet air handlers can be paired with the MXZ and the SUZ Universal Outdoor Unit for INVERTER-driven efficiency best appreciated while reviewing utility bills.



New for 2022

intelli-HEAT

The intelli-HEAT Dual Fuel System is specifically designed to fit on gas or propane furnaces^{*}. intelli-HEAT connects to highly efficient P-Series single- or multi-zone outdoor units including hyper-heating units. intelli-HEAT helps to reduce fossil fuel usage, Greenhouse Gases, and direct carbon emissions all while being less expensive to operate.



*Mitsubishi Electric air conditioner and heat pump systems should only be connected with ANSI-Z21.47/CSA2.3 certified furnaces



Nano-platinum Filter





Product Comparison Chart

	Ductes' check connection contraction contraction of the contraction of																		
Unit Type	Dus	SS SS ST	CLAST ST	Comme Si	to the state of th		inde contractions	inde one	autil one	Autoral 25		Sol Sol		anand fur	ict fin Di	Jal Barriet Wa	Plainur Plainur Că	ective pite	tilt ^{et} Dec
Wall-mounted																			
FS Model	•	•					•	•	•	•		•		•	•	•			•
EF Model	•							•	•			•				•			
GL Model	•	•		•	•			•	•			•		•		•			
GS Model	•		•	•	•							•					•		
PKA Model	•		•	•	•	•							•*						
HM/JP Model	•		•		•							•		•				•	
Floor-mounted																			
KJ Model	•	•				•		•	•			•		•		•			


Ceiling-mounte	ed										
MLZ Model	•	•		•	•	•	•		•	•	

SLZ Model	•	•	•		•	•	•	•	•			•			
PLA Model	•	•	•	•	•	•	•	•	*		•				
PCA Model	•		•	•	•	•	•	•		•	•				
Horizontal Duc	ted														

SEZ Model	•			•	•	•	•			•			
PEAD Model	•	•	•	•	•	•	•		•*	•			

Intelli-AIR and Ducted Air Handler

SVZ Model	•			•	•	•	•			•			
PVA Model		•	•	•	•				•*				
intelli-HEAT PAA Model			•	•	•	•	•		•*				

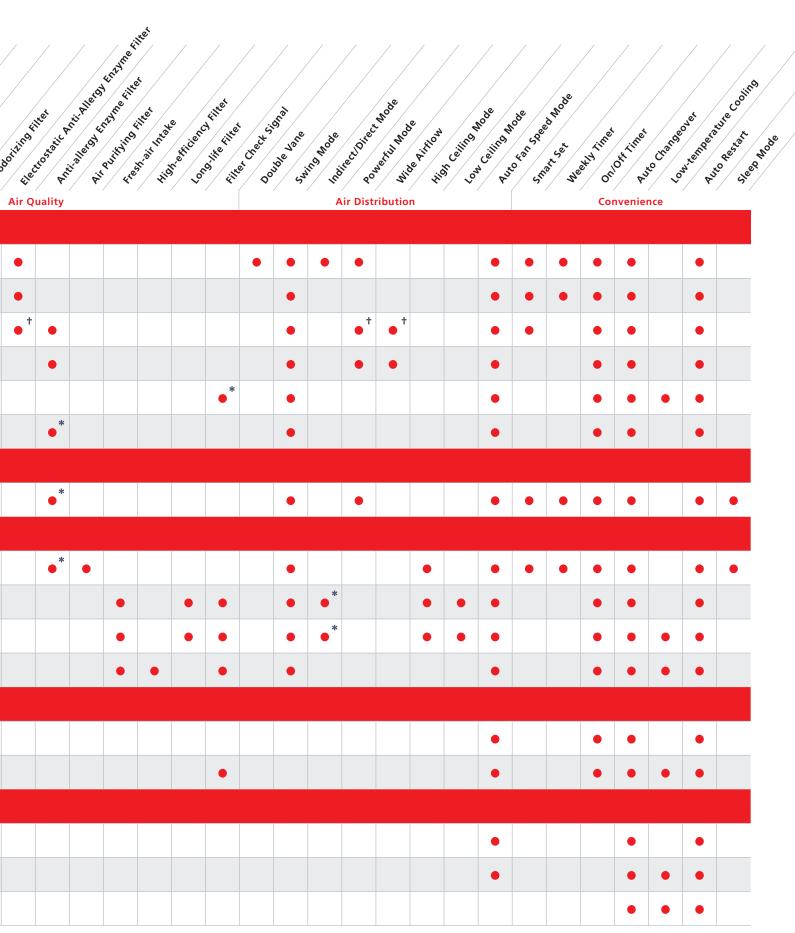

Glossary

ENERGY STAR®: the unit has received ENERGY STAR® certification

3D i-see Sensor[®]: scans each room to produce a complete thermal profile that includes heat signatures based upon size, temperature and movement

Econo Cool: adjusts the amount of air directed towards occupants based on the air-outlet temperature

Demand Function: when the unit is equipped with a commercially available timer or an On/Off switch added to the outdoor unit, a signal input from the outside can help reduce energy consumption

Dual Barrier Coating: Dual Barrier Coating is applied to the interior of the unit to protect against the buildup of dirt, dust, and oil reducing maintenance and improving longterm efficiency.

Blue Fin: particularly beneficial in coastal areas, this anti-corrosion treatment to the heat exchanger of the outdoor units prevents the corrosion caused by salt in the air that impacts the efficiency and performance of the units

HSPF: a ratio of BTU heat output over the heating season to watt-hours of electricity used. The higher the HSPF rating of a unit, the more energy efficient it is.

SEER: the rating of a unit's cooling output during a typical cooling-season divided by the total electric energy input during the same period. The higher the unit's SEER rating, the more energy efficient it is.

Nano Platinum Filter: incorporates nanometer-sized platinum-ceramic particles that kill bacteria and deodorize air

Catechin Filter: improves air quality and offers an excellent deodorizing effect by incorporating catechin, a bioflavonoid derived from green tea

Air Filter: removes dust particles from the air

Deodorizing Filter: this filter captures and breaks down odor-causing particles to eliminate unwanted smells

Electrostatic Anti-allergy Enzyme Filter: charged with static electricity, this filter attracts and captures dust particles, molds and bacteria and breaks them down with enzymes

Anti-allergy Enzyme Filter: traps allergens such as molds and bacteria and decomposes them using enzymes

Air Purifying Filter: the filter has a large capture area and deodorizes the circulating air

Fresh Air Intake: indoor air quality is enhanced by the direct intake of fresh exterior air

High-efficiency Filter: the fine mesh of this high-performance filter is capable of capturing tiny particulates that other filters miss

Long-life Filter: this high-performance filter has a longer maintenance cycle than conventional filters

Filter Check Signal: operating time is monitored, and the user is notified when filter maintenance is necessary

Double Vane: separates the airflow in different directions to deliver airflow across a wide area of the space and simultaneously to people in different locations

Swing Mode: indoor unit moves air throughout the room like an oscillating fan

Indirect/Direct Mode: this mode offers finely-tuned operation by locating where an occupant is in the room and sends the air directly or indirectly according to the selected mode

Powerful Mode: temporarily drops or raises the set temperature for 15 minutes so that automatic fan speed adjustments made possible by the INVERTER will more quickly bring your room to your desired temperature

Wide Airflow: especially beneficial for large spaces, this capability helps ensure that air is well circulated and reaches every corner of the room High Ceiling Mode: in the case of rooms with high ceilings, the outletair volume can be increased to ensure that air is circulated all the way to the floor

Low Ceiling Mode: if the room has a low ceiling, the airflow volume can be reduced for less draft

Auto Fan Speed Mode: adjusts the fan speed of the indoor unit automatically according to the present room conditions

Smart Set: a simplified setting function that recalls the preferred (preset) temperature by pressing a single button on the remote controller

Weekly Timer: easily set desired temperatures and operation ON/OFF times to match your lifestyle

On/Off Timer: use the remote controller to set the times of turning the unit on and off

Auto Changeover: automatically switches between heating and cooling modes to maintain the desired temperature

Low-temperature Cooling: intelligent fan speed control on P-series outdoor units that ensures optimum performance even when the outside temperature is low

Auto Restart: especially useful at the time of power outages, the unit turns back on automatically when power is restored

Sleep Mode: 30 minutes after Sleep Mode is activated, the unit will change the daytime set temperature to the temperature you prefer while sleeping, automatically lowering the fan speed as necessary

One of the best warranties in the business

Mitsubishi Electric products are supported by a trusted team of **Diamond Contractors**[®]. When you choose to work with a Diamond Contractor, not only do you get the benefit of their experience and expertise, but you can also increase the warranty on your purchase to 12 years.



12-year Warranty

Most products that are installed and registered by a Diamond Contractor^{*} within 90 days of installation receive a 12-year parts and compressor warranty. HM Model and WR model products are eligible for a maximum 10-year warranty.

10-year Warranty

Products that are registered within 90 days of installation receive a 10-year parts and compressor warranty.

5- & 7-year Warranties

All products, regardless of registration, receive a five-year parts warranty and seven-year compressor warranty.






Visit **mitsubishicomfort.com** to find a Diamond Contractor in your area.



Mitsubishi Electric's air conditioning and heating systems are so energy efficient that a majority of our INVERTER-driven systems have received ENERGY STAR[®] certification.

This efficiency can mean huge savings on your utility bills. Additionally, federal tax credits and rebates from utility companies and local governments may provide a further financial incentive for you to take full control of your comfort. Rebates come in many forms, from property and sales tax exemptions to loans and grants.

Visit the Rebates & Financing tab on mitsubishicomfort.com to search for available rebates.





mitsubishicomfort.com

MITSUBISHI ELECTRIC TRANE HVAC US

© 2022 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

Mitsubishi Electric, Lossnay, and the three-diamond logo are trademarks of Mitsubishi Electric Corporation. CITY MULTI, kumo cloud, kumo station and H2i are registered trademarks of Mitsubishi Electric US, Inc. Trane and American Standard are registered trademarks of Trane Technologies plc. All other product names mentioned herein are trademarks or registered trademarks of their respective owners.

ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the United States Environmental Protection Agency.

Use of the AHRI Certified® mark indicates a manufacturer's participation in the certification program. For verification of certification for individual products, go to www.ahridirectory.org.

Specifications shown in this brochure are subject to change without notice. See complete warranty for terms, conditions and limitations. A copy is available from Mitsubishi Electric Trane HVAC US LLC.